


PL-PANEL-MASTER-FLX(-TAB)

Internal Electrical Wiring Diagram

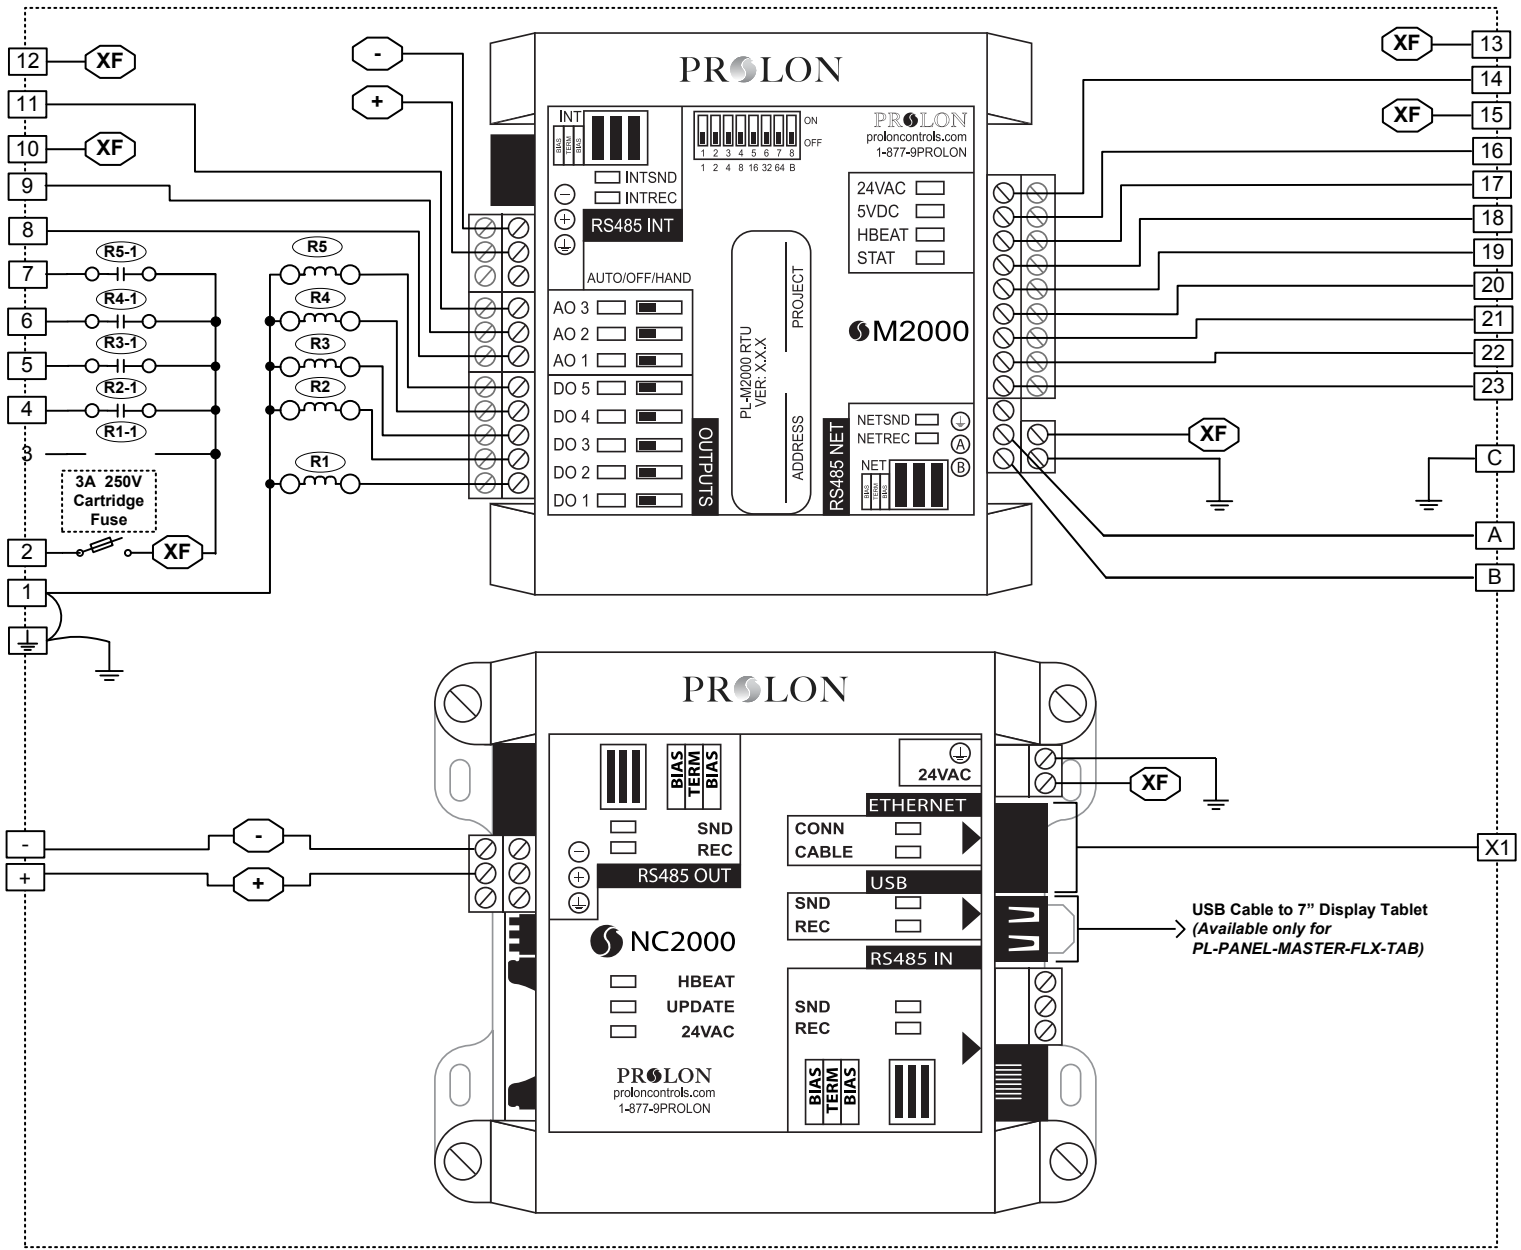

Legend:

- Interconnection carrying 24 VAC
- Interconnection carrying M2000 INT A(+)
- Interconnection carrying M2000 INT B(-)
- Single pole, double throw relay

Field Wiring Details

Terminal	Function	Ratings	Wiring Details
	GROUND	N/A	Use Copper Conductors Only, 105°C/220°F, Maximum Torque Conductor Mounting: 0.5Nm
1	Power Supply Input Common	N/A	Use Copper Conductors Only, 105°C/220°F, Maximum Torque Conductor Mounting: 0.5Nm
2	Power Supply Input 24VAC	24 VAC, 3 A, 60 Hz	Use Copper Conductors Only, 105°C/220°F, Maximum Torque Conductor Mounting: 0.5Nm
3	Digital Output 1	24 VAC, 300 mA	Use Copper Conductors Only, 105°C/220°F, Maximum Torque Conductor Mounting: 0.5Nm
4	Digital Output 2	24 VAC, 300 mA	Use Copper Conductors Only, 105°C/220°F, Maximum Torque Conductor Mounting: 0.5Nm
5	Digital Output 3	24 VAC, 300 mA	Use Copper Conductors Only, 105°C/220°F, Maximum Torque Conductor Mounting: 0.5Nm
6	Digital Output 4	24 VAC, 300 mA	Use Copper Conductors Only, 105°C/220°F, Maximum Torque Conductor Mounting: 0.5Nm
7	Digital Output 5	24 VAC, 300 mA	Use Copper Conductors Only, 105°C/220°F, Maximum Torque Conductor Mounting: 0.5Nm
8	Analog Output 1	0-10VDC, 40 mA	Use Copper Conductors Only, 105°C/220°F, Maximum Torque Conductor Mounting: 0.5Nm
9	Analog Output 2	0-10VDC, 40 mA	Use Copper Conductors Only, 105°C/220°F, Maximum Torque Conductor Mounting: 0.5Nm
10	Power Supply 24VAC	24 VAC, 8.5 VA	Use Copper Conductors Only, 105°C/220°F, Maximum Torque Conductor Mounting: 0.5Nm
11	Analog Output 3	0-10VDC, 40mA	Use Copper Conductors Only, 105°C/220°F, Maximum Torque Conductor Mounting: 0.5Nm
12	Power Supply 24VAC	24 VAC, 5 VA	Use Copper Conductors Only, 105°C/220°F, Maximum Torque Conductor Mounting: 0.5Nm
13	Power Supply 24VAC	24 VAC, 0.03 A	Use Copper Conductors Only, 105°C/220°F, Maximum Torque Conductor Mounting: 0.5Nm
14	Analog Input 9	5 VDC, 20 mA	Use Copper Conductors Only, 105°C/220°F, Maximum Torque Conductor Mounting: 0.5Nm
15	Power Supply 24VAC	24 VAC, 6.7 VA	Use Copper Conductors Only, 105°C/220°F, Maximum Torque Conductor Mounting: 0.5Nm
16	Analog Input 8	5 VDC, 20 mA	Use Copper Conductors Only, 105°C/220°F, Maximum Torque Conductor Mounting: 0.5Nm
17	Analog Input 7	5 VDC, 20 mA	Use Copper Conductors Only, 105°C/220°F, Maximum Torque Conductor Mounting: 0.5Nm
18	Analog Input 6	5 VDC, 20 mA	Use Copper Conductors Only, 105°C/220°F, Maximum Torque Conductor Mounting: 0.5Nm
19	Analog Input 5	5 VDC, 20 mA	Use Copper Conductors Only, 105°C/220°F, Maximum Torque Conductor Mounting: 0.5Nm
20	Analog Input 4	5 VDC, 20 mA	Use Copper Conductors Only, 105°C/220°F, Maximum Torque Conductor Mounting: 0.5Nm
21	Analog Input 3	5 VDC, 20 mA	Use Copper Conductors Only, 105°C/220°F, Maximum Torque Conductor Mounting: 0.5Nm
22	Analog Input 2	5 VDC, 20 mA	Use Copper Conductors Only, 105°C/220°F, Maximum Torque Conductor Mounting: 0.5Nm
23	Analog Input 1	5 VDC, 20 mA	Use Copper Conductors Only, 105°C/220°F, Maximum Torque Conductor Mounting: 0.5Nm
+	M2000 RS485 INT A (+)	N/A	Use Copper Conductors Only, 105°C/220°F, Maximum Torque Conductor Mounting: 0.5Nm
-	M2000 RS485 INT B (-)	N/A	Use Copper Conductors Only, 105°C/220°F, Maximum Torque Conductor Mounting: 0.5Nm
A	M2000 RS485 NET A (+)	N/A	Use Copper Conductors Only, 105°C/220°F, Maximum Torque Conductor Mounting: 0.5Nm
B	M2000 RS485 NET B (-)	N/A	Use Copper Conductors Only, 105°C/220°F, Maximum Torque Conductor Mounting: 0.5Nm
X1	NC2000 Ethernet Connection	N/A	Use CAT5e Path Cable
C	COMMON	N/A	Use Copper Conductors Only, 105°C/220°F, Maximum Torque Conductor Mounting: 0.5Nm

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

